DEUREX® EO 4560 M

TECHNICAL INFORMATION

Chemical description: Micronized oxidized HDPE

Benefits: DEUREX® EO 45 probably the hardest wax in the world

Applications:
- Flexo- and gravure inks
- Lithographic paste inks
- Heat set
- Used in water-based-coatings and inks,
- UV/EB cured coatings and inks
- Dry-film lubricants and thinner film applications
- Powder coatings

Properties:
- High temperature stability
- Outstanding abrasion resistance and toughness
- Very good blocking resistance
- Friction coefficient might be the best choice from all waxes
- Excellent antisettling and antifloating properties
- Highly compatible with aqueous-based systems
- Non sticky, free flowing matting lubricant

Technical data:

Colour: White
Consistencies: **DEUREX® EO 4560 M** = Micronized powder

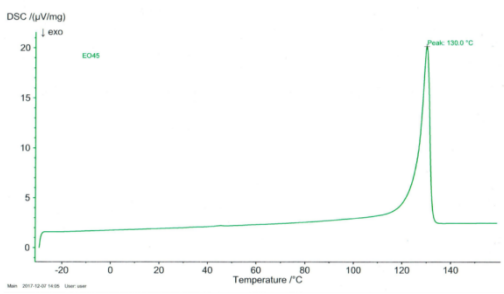

	Minimum	Maximum	Method
Particle size*: Typical value:		98% < 60 µm 50% ~ 18 µm	LV 5 (DIN ISO 13320)
Drop point*:	132 °C	135 °C	LV 12 (DGF M-III 3)
Penetration:		0.5 mm*10^{-1}	LV 4 (DIN 51579)
Density (23 °C):	0.97 g/cm³	0.99 g/cm³	LV 3 (DIN EN ISO 1183)

* Part of certificate of analysis

Approvals: DEUREX® EO 4560 M is approved for the production of commodities intended to come into contact with food.
EU: Regulation (EU) 10/2011
USA: FDA 21 CFR §§ 175.105, 176.180, 176.200, 176.210, 177.2800
(Approvals with regard to limitations and migration values in the final application)

Alternative products : **BIOMER® 130** – Biodegradable high melting wax

Alternative delivery forms:
DEUREX® EO 45 K – Fine granules
DEUREX® EO 45 A – Fine powder, 98% < 150 µm
DEUREX® EO 4520 M – Micronized powder powder, 98% < 20 µm
DEUREX® EO 4530 M – Micronized powder powder, 98% < 30 µm
DEUREX® EO 4545 M – Micronized powder powder, 98% < 45 µm
DEUREX® EO 4501 W – Water based emulsion of a oxidized HDPE
DEUREX® EO 4508 W – Water based disperison of a oxidized HDPE

DEUREX AG
Dr.-Bergius-Straße 8-12
D-06729 Elsteraue

T.:+49 (0) 03441/8 29 29 29
F.:+49 (0) 03441/8 29 29 28
info@deurex.com / www.deurex.com