


## DEUREX EO 45 A

### TECHNICAL INFORMATION

- Chemical description:** Micronized oxidized HDPE
- Benefits:** DEUREX EO 45 probably the hardest wax in the world
- Applications:**
- Flexo- and gravure inks
  - Lithographic paste inks
  - Used in water-based-coatings and inks,
  - UV/ EB / IR cured coatings and inks
  - Dry-film lubricants and thinner film applications
  - Powder coatings
- Properties:**
- High temperature stability
  - Outstanding abrasion resistance and toughness
  - Very good blocking resistance
  - Best wax for reducing the coefficient of friction
  - Excellent antisetling and antifloating properties
  - Highly compatible with aqueous-based systems
  - Non sticky, free flowing matting lubricant

**Technical data:**

Colour: White  
Consistencies: Finest powder, 98 % < 150 µm

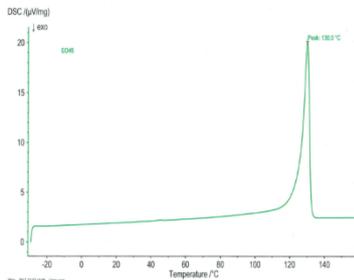

	Minimum	Maximum	Method
Drop point*:	132 °C	135 °C	ASTM D 3954
Acid value:	23 mgKOH/g	27 mgKOH/g	ASTM D 1386
Penetration:		0.5 mm*10 <sup>-1</sup>	ASTM D 1321
Density (23 °C):	0.97 g/cm <sup>3</sup>	0.99 g/cm <sup>3</sup>	ISO 1183

\* Part of certificate of analysis

**Approvals:** Food contact approvals

**Alternative products :** See <https://www.deurex.com/productsearch/DEUREX-EO-45-A/>

This data sheet is based on our current knowledge and experience. In view of the individual factors that may affect processing and application, this data does not relieve users from the responsibility of carrying out their own tests and experiments, neither do they imply any legally binding assurance of certain properties. Existing industrial/commercial protective laws have to be considered by the recipient. Updated versions of the data sheet replace all formerly existing versions.